


Габаритные размеры для PN6/10/16 поворотных заслонок типа "бабочка" D6...

Модель	DN, мм	Фланец	D2	L2	H1	H2	H3	L1	O1	PN6		PN10		PN16		Вес кг
										D1	n- ∅	D1	n- ∅	D1	n- ∅	
D650	50	F05	93	33	70	134	13	43	65	110	4-14	125	4-19	125	4-19	2.3
D665	65	F05	107	48	76	147	13	46	65	130	4-14	145	4-19	145	4-19	2.8
D680	80	F05	123	66	89	158	13	46	65	150	4-19	160	8-19	160	8-19	3.5
D6100	100	F05	151	91	104	173	13	52	75	170	4-19	180	8-19	180	8-19	5.5
D6125	125	F07	177	115	118	195	19	56	90	200	8-19	210	8-19	210	8-19	7.4
D6150	150	F07	204	142	132	213	19	56	90	225	8-19	240	8-23	240	8-23	9.0
D6200	200	F07	260	194	167	247	19	60	125	280	8-19	295	8-23	295	12-23	15.0
D6250	250	F10	314	245	167	287	24	68	125	335	12-19	350	12-23	350	12-28	21.5
D6300	300	F10	370	294	239	316	24	78	125	395	12-23	400	12-23	410	12-28	32.3
D6350	350	F10	422	328	265	345	24	79	150	445	12-23	460	16-23	470	16-28	43.5

Способы соединения электроприводов заслонками

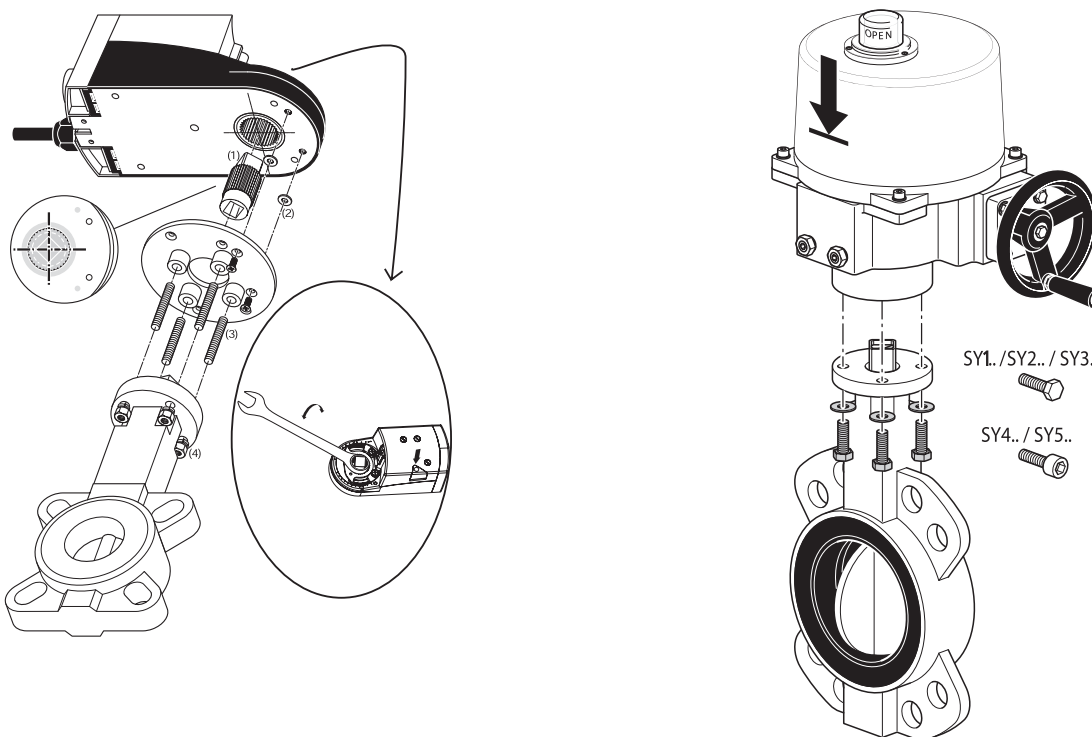

Подбор поворотной заслонки типа "бабочка" D6...:

DN, мм	Тип	Запираемое давление Δps, кПа							
		Степень защиты IP 54			Степень защиты IP 67				
		AF... [15 Нм]	SM...A [20 Нм]	GM...A [40 Нм]	SY1... [35 Нм]	SY2... [90 Нм]	SY3... [150 Нм]	SY4... [400 Нм]	SY5 [500 Нм]
50	D650	1200	1200	-	1200	-	-	-	-
65	D665	1200	1200	-	1200	-	-	-	-
80	D680	400	800	1200	1200	-	-	-	-
100	D6100	-	200	1200	1200	-	-	-	-
125	D6125	-	-	800	-	1200	-	-	-
150	D6150	-	-	-	-	1200	-	-	-
200	D6200	-	-	-	-	600	1200	-	-
250	D6250	-	-	-	-	-	-	1200	-
300	D6300	-	-	-	-	-	-	600	1200
350	D6350	-	-	-	-	-	-	-	800